




M9500-SPDT Full Size Teflon® (PTFE) Float Level Switch

1/4" NPT PTFE Single Pole Double Throw Float Switch

The M9500-SPDT liquid level float switch is manufactured with high purity PTFE stem and float. This float switch is well suited for corrosive environments and is resistant to build-up of foreign material and sticky fluids. These float switches are ideal for single point level control and can be easily extended to detect critical levels with standard pipe fittings. This Teflon float switch provides many years of trouble free switching in even the harshest conditions.



Specifications	
M9500-SPDT	Full Size Teflon Float Switch
Stem Material	PTFE
Float Material	PTFE
Fitting Type	1/4" NPT
Max. Temperature	150° C
Max. Pressure	40 PSIG @ 21° C
Float SG	0.63 SG
Switch Rating	25 Watt, 120V max. (AC/DC), SPDT
Lead Wires	24", 22 AWG, Teflon Insulated (Standard)
Approvals	CE
Availability	Call for Availability

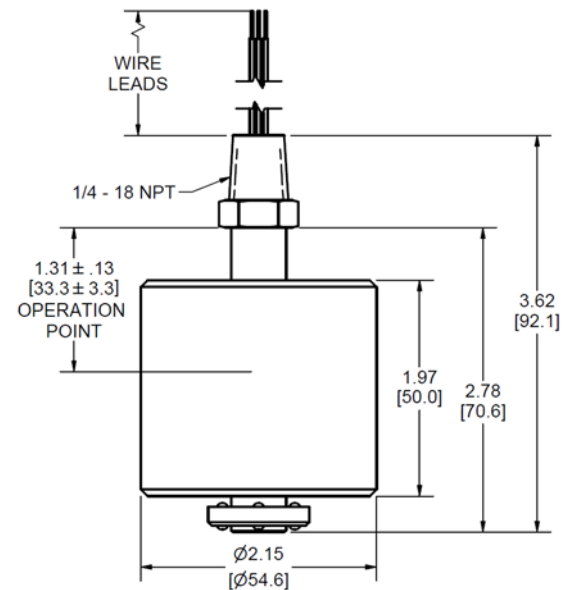

Applications

- ◆ Corrosion resistant
- ◆ Low or High Level Switch Indication
- ◆ Corrosive or Sticky Fluids
- ◆ High Purity Chemical Processing

* No need to flip the float, simply select the SPDT wires for the desired switch type.

Electrical Ratings


Switches are rated for resistive loads. The table below represents the UL guidelines for current (Amperes resistive) at different voltages.

AC Voltage

25 VA Nominal at 120 Vac 0..28 amps max

DC Voltage

25 Watt Nominal at 24 Vdc 0.28 amps max



Madison Company

Tel: (203)-488-4477

www.madisonco.com

<mailto:info@madisonco.com>